

*Flexible digital gauge system for multi-point measuring*



## MULTI-INTERFACE UNIT

The “MG” series is a modular gauging system that allows for flexible, multi-point measuring, with built-in software for today’s most popular output protocols.

Because of its modular construction, the “MG” system can be easily mounted to a standard DIN rail (35mm), requires minimal wiring, and can be easily expanded for future upgrades.

- Up to 64 connectable gauges
- Input resolutions: 0.1 $\mu$ m, 0.5 $\mu$ m, 1 $\mu$ m, 5 $\mu$ m, and 10 $\mu$ m.
- Compatible with RS-232C, BCD
- Operating voltage: 12-24VDC
- DIN rail mounting (35mm)



Sony Manufacturing Systems Corporation



Isehara Center is registered to ISO 9001( Quality )

## Main module

Model name		MG10-P1	MG10-P2
Power source	Supply voltage	DC12-24V(11-26.4V)Min. startup time: 100ms or less	
	Power consumption	2.0W + total power consumption for connected modules*1	
	Inrush current (10ms)	10A or less (when maximum number of modules are connected)	
	Power supply protection	Fuse (5A fuse is built in.)	
Communication	Communication I/F	RS-232C (EIA-232C or equivalent)	
	Baud rate setting	2400 / 9600 / 19200 / 38400 bps (set with DIP switch)	
	Data length	7 / 8 bit (set with DIP switch)	
	Stop bit	1 / 2 bit (set with DIP switch)	
	Parity	none / ODD / EVEN (set with DIP switch)	
Linkage function	Delimiter	CR / CR+LF (set with DIP switch)	
	Maximum number of linkages	16 (total of counter modules: 64)	
I/O	Maximum length of linking cable	10m	
	Input format	source input (+COM)	sink input (-COM)
	Output format	sink type (-COM)	source type (+COM)
	Input signal	Photo coupler insulation, external power: DC5 - 24V	
	Output signal	Photo coupler insulation, external power: DC5 - 24V	
	Counter modules	reset, pause, start, latching, and data out trigger to whole channels	
Connectable modules	Interface modules	integrated alarm	
	Counter modules	MG20-DK, MG20-DG and MG-20DT (available for mixed use, up to 16 modules) *1	
		MG30-B1, MG30-B2	

\*1: Total power of modules connected to MG10 should not be over 54W (12VDC Input) or 108 W (24VDC Input).

## Counter module


Model name		MG20-DK	MG20-DG	MG20-DT
Power consumption		1W + power consumption for connected gauge	1.4W (connected to DG-B) / 0.5W (connected to DL-B)	0.8W
Measuring unit input	Corresponding gauge	DK series (A/B quadrature input)	DG**B series, DL**B/DL**BR series	DT series
	Allowable resolution setting *2	10 / 5 / 1 / 0.5 / 0.1μm	10 / 5 / 0.5μm	5μm(DT12/32) 1μm(DT512)
	Maximum response speed	Subject to the specification of the connected gauge		
	Reference point *3	set with DIP switch		
Others	Alarm	REF-LED (reference point loaded) shows on the display after the reference point is detected. Set "0" or preset value on the counter when the reference point is detected.		
		S-ALM LED activates by excess speed/acceleration of measuring unit. C-ALM LED activates by excess speed of the internal circuit of counter. Alarm display is cancelled by reset command from MG10 or with the reset button of main unit.		

\*2: Set the resolution value of the connected gauge. \*3: MG20-DG work only connect to DL\*\*BR series

## Interface module


Model name		MG30-B1	MG30-B2
Power consumption		1w	
I/O	Input format	source input (+com)	sink input (-com)
	Output format	sink type (-com)	source type (+com)
	Input signal	Photo coupler insulation, external power: DC5 - 24V	
	Output signal	Photo coupler insulation, external power: DC5 - 24V	
Output setting		DRQ / channel address / measuring mode shifting / comparator shifting / reset / start / posing / reference point loaded	
		BCD data (6 digits) / READY / code / GO/NO GO output / alarm / reference point loaded	
		timer (1~128ms) / OUT / OR / polarity (set with internal DIP switch)	
All models	Operating temperature	0~+50°C (No condensation)	
	Storage temperature	-10~+60°C (20~90%RH)	

## System structure

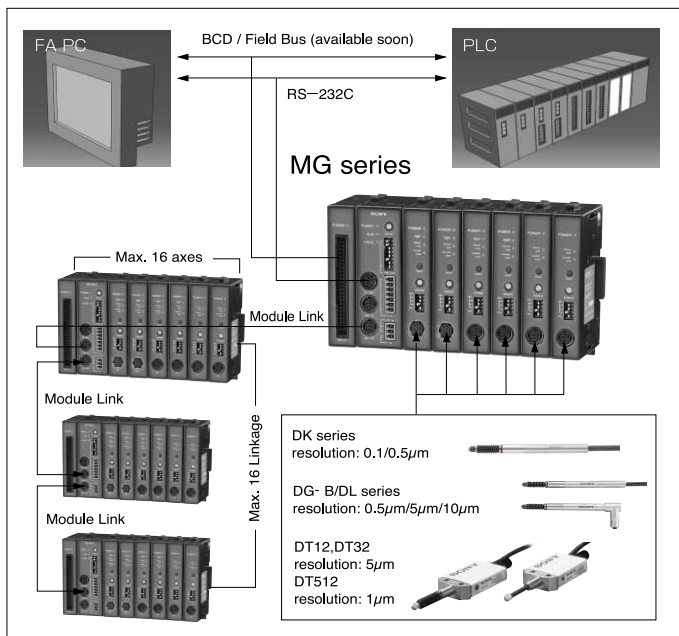


⚠ Safety notice: Prior to use, be absolutely certain to read and understand the Operating Instruction to ensure proper use of this product.

## "MG" Multi Interface unit operates with a variety of modules.

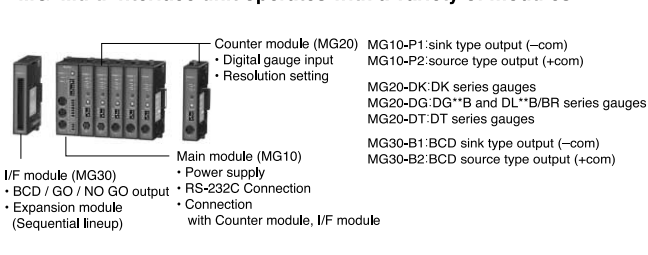

## Dimensions

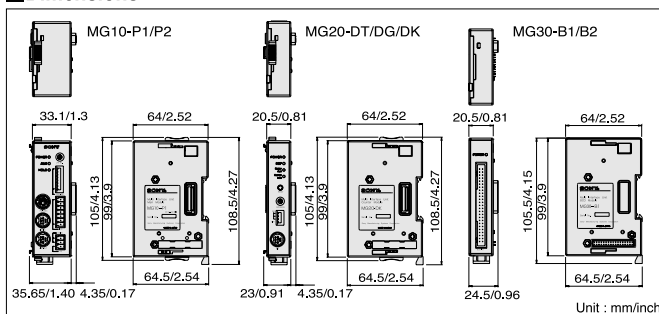

● Specifications and dimensions listed in this brochure are subject to change without notice due to product improvement.

## Sony Manufacturing Systems Corporation

Sony Manufacturing Systems Corporation  
 Measuring Systems Sales Dept.  
 Suzukawa 45 Isehara-shi, Kanagawa-ken, 259-1146, Japan  
 Tel: +81-463-92-7971 Fax: +81-463-92-7979  
<http://www.sonymss.com.jp>

Sony Taiwan Limited  
 FA Marketing Group  
 6F, 145 Changchun Road, Taipei 104, Taiwan  
 Tel: +886-2-2522-9760 Fax: +886-2-2522-2396  
<http://www.sony.com.tw/company/family/FA/FA.asp>

<http://www.sonymss.com.jp/>

This catalog follows the state at 5, 2005.

Sony Manufacturing Systems America, Inc.  
 20381 Hermosa Circle Lake Forest, California 92630-8701  
 Tel: +1-949-770-8400 Fax: +1-949-770-8408  
<http://www.sonymss.com>

Sony Manufacturing Systems Europe  
 Semiconductor & Electronic Solutions  
 Measuring Systems  
 Hedelfinger Strasse 61, D-70327 Stuttgart, Germany  
 Tel: +49-711-5858-777 Fax: +49-711-580-715  
<http://www.sonymanufacturing.com>



Used material: 100% recycled paper, recyclable  
 Zero-VOC (Volatile Organic Compound) vegetable oil ink  
 ©SONY catalog #497

011E-0505-05-01A