


Capillary Tube Fittings

6 Series

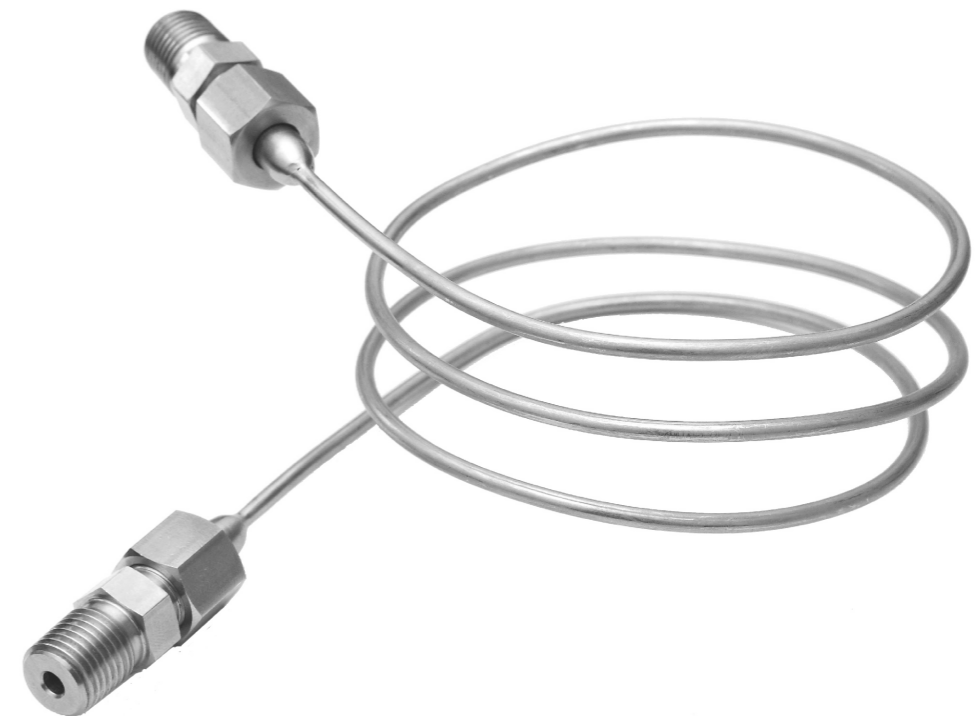

FITOK Group

FITOK GmbH (Headquarter)

Sprendlinger Landstr. 115, 63069 Offenbach, Germany
Tel.: +49 69 8900 4498
Fax: +49 69 8900 4495

FITOK INC.

13000 Murphy Road, Suite 116, Stafford, TX 77477, USA
Tel.: +1 281 888 0077
Fax: +1 281 888 0033

FITOK INCORPORATED

Yingtailong Industrial Park, Shenzhen, 518109, China
Tel.: +86 755 2803 2500
Fax: +86 755 2803 2619

info@fitokgroup.com
www.fitokgroup.com

FI05040813

FITOK
Valves and Fittings

www.fitokgroup.com

Features


- Fully annealed stainless steel capillary tube provides excellent flexibility with the minimum bending radius of 9 mm.
- Ball surface seal ensures no leakage.
- Maximum working temperature is 850°F (454°C).
- Maximum working pressure is 8550 psig (590 bar). Multiply 8550 psig (590 bar) by the elevated temperature factors to get the working pressure at elevated temperature. To locate the elevated temperature factor, please refer to the related information of FITOK Tubes and Pipes page 11.
- Every fitting is tested with nitrogen for leak-tight performance at 1.5 the times maximum working pressure.
- Every part of the fitting is stamped with size, material, and heat code.
- Standard material is 316 SS, other materials are available upon request.
- Body can be replaced by FITOK 6 series tube fitting body.

Material Specifications

Component	Material Specification
Capillary tube	316L/A269
Others	316/A276

Ordering Information and Dimensions

Fittings

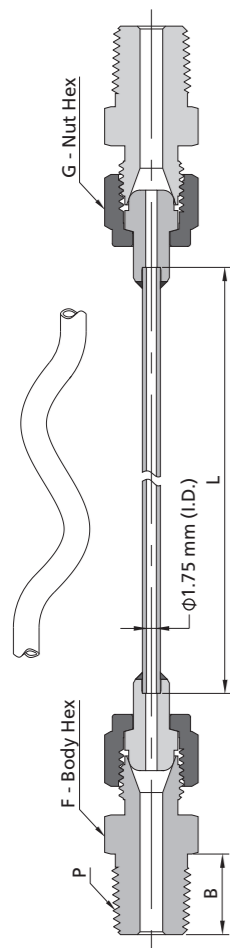



Dimensions are for reference only, subject to change.

NPT Thread							
CTF Size	P-NPT Size	Ordering Number	L (m)	Dimension, in. (mm)			G
				F	B		
1/4	1/16	SS-CTF-4-NS1-1M	1	0.50 (12.7)	0.38 (9.7)	0.56 (14.3)	
1/4	1/16	SS-CTF-4-NS1-2M	2	0.50 (12.7)	0.38 (9.7)	0.56 (14.3)	
1/4	1/8	SS-CTF-4-NS2-1M	1	0.50 (12.7)	0.38 (9.7)	0.56 (14.3)	
1/4	1/8	SS-CTF-4-NS2-2M	2	0.50 (12.7)	0.38 (9.7)	0.56 (14.3)	
1/4	1/4	SS-CTF-4-NS4-1M	1	0.56 (14.3)	0.56 (14.2)	0.56 (14.3)	
1/4	1/4	SS-CTF-4-NS4-1.5M	1.5	0.56 (14.3)	0.56 (14.2)	0.56 (14.3)	
1/4	1/4	SS-CTF-4-NS4-2M	2	0.56 (14.3)	0.56 (14.2)	0.56 (14.3)	
1/4	3/8	SS-CTF-4-NS6-1M	1	0.69 (17.5)	0.56 (14.2)	0.56 (14.3)	
1/4	3/8	SS-CTF-4-NS6-2M	2	0.69 (17.5)	0.56 (14.2)	0.56 (14.3)	
1/2	1/2	SS-CTF-8-NS8-1M	1	0.87 (22.2)	0.75 (19.1)	0.87 (22.2)	
1/2	1/2	SS-CTF-8-NS8-1.5M	1.5	0.87 (22.2)	0.75 (19.1)	0.87 (22.2)	
1/2	1/2	SS-CTF-8-NS8-2M	2	0.87 (22.2)	0.75 (19.1)	0.87 (22.2)	


ISO Tapered Thread							
CTF Size	P-ISO Thread Size	Ordering Number	L (m)	Dimension, in. (mm)			G
				F	B		
1/4	1/16	SS-CTF-4-RT1-1M	1	0.50 (12.7)	0.38 (9.7)	0.56 (14.3)	
1/4	1/16	SS-CTF-4-RT1-2M	2	0.50 (12.7)	0.38 (9.7)	0.56 (14.3)	
1/4	1/8	SS-CTF-4-RT2-1M	1	0.50 (12.7)	0.38 (9.7)	0.56 (14.3)	
1/4	1/8	SS-CTF-4-RT2-2M	2	0.50 (12.7)	0.38 (9.7)	0.56 (14.3)	
1/4	1/4	SS-CTF-4-RT4-1M	1	0.56 (14.3)	0.56 (14.2)	0.56 (14.3)	
1/4	1/4	SS-CTF-4-RT4-1.5M	1.5	0.56 (14.3)	0.56 (14.2)	0.56 (14.3)	
1/4	1/4	SS-CTF-4-RT4-2M	2	0.56 (14.3)	0.56 (14.2)	0.56 (14.3)	
1/4	3/8	SS-CTF-4-RT6-1M	1	0.69 (17.5)	0.56 (14.2)	0.56 (14.3)	
1/4	3/8	SS-CTF-4-RT6-2M	2	0.69 (17.5)	0.56 (14.2)	0.56 (14.3)	
1/2	1/2	SS-CTF-8-RT8-1M	1	0.87 (22.2)	0.75 (19.1)	0.87 (22.2)	
1/2	1/2	SS-CTF-8-RT8-1.5M	1.5	0.87 (22.2)	0.75 (19.1)	0.87 (22.2)	
1/2	1/2	SS-CTF-8-RT8-2M	2	0.87 (22.2)	0.75 (19.1)	0.87 (22.2)	

Fittings

Replacement Parts - Bodies



Replacement Parts - Capillary Tube Sets

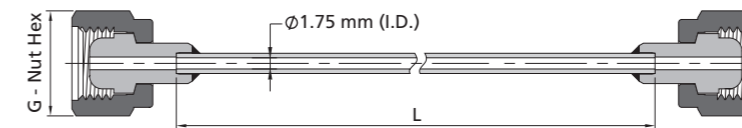

CTF Size	Ordering Number	L (m)	G in. (mm)
1/4	SS-CTS-4-1M	1.0	0.56 (14.3)
1/4	SS-CTS-4-1.5M	1.5	0.56 (14.3)
1/4	SS-CTS-4-2M	2.0	0.56 (14.3)
1/2	SS-CTS-8-1M	1.0	0.87 (22.2)
1/2	SS-CTS-8-1.5M	1.5	0.87 (22.2)
1/2	SS-CTS-8-2M	2.0	0.87 (22.2)

Metric Thread							
CTF Size	P-Metric Thread Size	Ordering Number	L (m)	Dimension, mm (in.)			G
				F	B		
1/4	M14 x 1.5	SS-CTF-4-MS14-1M	1	16.0 (0.63)	13.0 (0.51)	14.3 (0.56)	
1/4	M14 x 1.5	SS-CTF-4-MS14-2M	2	16.0 (0.63)	13.0 (0.51)	14.3 (0.56)	
1/2	M20 x 1.5	SS-CTF-8-MS20-1M	1	22.0 (0.87)	16.0 (0.63)	22.2 (0.87)	
1/2	M20 x 1.5	SS-CTF-8-MS20-2M	2	22.0 (0.87)	16.0 (0.63)	22.2 (0.87)	

NPT Thread						
CTF Size	P-NPT Size	Ordering Number	Dimension, in. (mm)		Replaceable by the Body of	
			F	B		
1/4	1/16	SS-CTF-4-NS1-B	0.50 (12.7)	0.38 (9.7)	SS-CM-FL4-NS1	
1/4	1/8	SS-CTF-4-NS2-B	0.50 (12.7)	0.38 (9.7)	SS-CM-FL4-NS2	
1/4	1/4	SS-CTF-4-NS4-B	0.56 (14.3)	0.56 (14.2)	SS-CM-FL4-NS4	
1/4	3/8	SS-CTF-4-NS6-B	0.69 (17.5)	0.56 (14.2)	SS-CM-FL4-NS6	
1/2	1/2	SS-CTF-8-NS8-B	0.87 (22.2)	0.75 (19.1)	SS-CM-FL8-NS8	

ISO Tapered Thread						
CTF Size	P-ISO Thread Size	Ordering Number	Dimension, in. (mm)		Replaceable by the Body of	
			F	B		
1/4	1/16	SS-CTF-4-RT1-B	0.50 (12.7)	0.38 (9.7)	SS-CM-FL4-RT1	
1/4	1/8	SS-CTF-4-RT2-B	0.50 (12.7)	0.38 (9.7)	SS-CM-FL4-RT2	
1/4	1/4	SS-CTF-4-RT4-B	0.56 (14.3)	0.56 (14.2)	SS-CM-FL4-RT4	
1/4	3/8	SS-CTF-4-RT6-B	0.69 (17.5)	0.56 (14.2)	SS-CM-FL4-RT6	
1/2	1/2	SS-CTF-8-RT8-B	0.87 (22.2)	0.75 (19.1)	SS-CM-FL8-RT8	

Metric Thread						
CTF Size	P-Metric Thread Size	Ordering Number	Dimension, mm (in.)		Replaceable by the Body of	
			F	B		
1/4	M14 x 1.5	SS-CTF-4-MS14-B	16.0 (0.63)	13.0 (0.51)	SS-CM-FL4-MS14	
1/2	M20 x 1.5	SS-CTF-8-MS20-B	22.0 (0.87)	16.0 (0.63)	SS-CM-FL8-MS20	